

SHENZHEN HIGHSTARTECH ELECTRONICS CO., LTD

HSEE2006 TRANSFORMER SERIES

1. FEATURES:

- (1) It is miniaturised to be easily PCB mounted.
- (2) It has very high insulation of 4000Vrms Hi-pot.
- (3) It accords with UL94V-0 flammability requirements.
- (4) Heat-resistance reaches 130°C.

2. APPLICATIONS:

- (1) Medical equipments; Test equipment.
- (2) Industrial equipments; Industrial controls; Industrial computers.
- (3) Avionics & telecom.


3. PART NUMBER SYSTEM:

HSEE - 2006 - 01

(1) (2) (3)

- (1) Series name.
- (2) 2006 is size.
- (3) 01 is sequence number.

4. PHYSICAL CHARACTERISTICS:

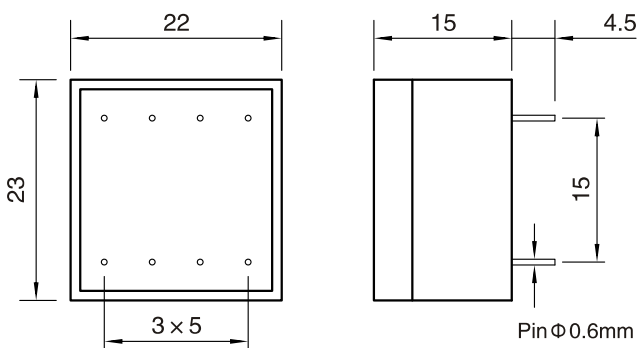

All dimensions in mm

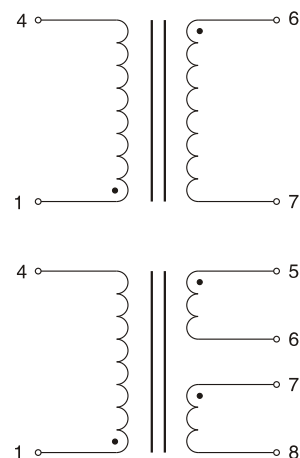


Fig 1

Fig 2

SHENZHEN HIGHSTARTECH ELECTRONICS CO., LTD

HSEE2006 TRANSFORMER SERIES

5. ELECTRICAL CHARACTERISTICS:

Part Number	Primary (V)	Secondary (V/mA)	No-load voltage(V)	Fig.	Part Number	Primary (V)	Secondary (V/mA)	No-load voltage(V)	Fig.
HSEE200601	230	6/58.0	10.80	1	HSEE200613	115	6 / 58.0	10.80	1
HSEE200602	230	9/39.0	16.50	1	HSEE200614	115	9 / 39.0	16.50	1
HSEE200603	230	12/29.0	21.90	1	HSEE200615	115	12 / 29.0	21.90	1
HSEE200604	230	15/23.0	27.00	1	HSEE200616	115	15 / 23.0	27.00	1
HSEE200605	230	18/19.0	31.50	1	HSEE200617	115	18 / 19.0	31.50	1
HSEE200606	230	24/14.0	41.70	1	HSEE200618	115	24 / 14.0	41.70	1
HSEE200607	230	2 x 6 / 29.0	2 x 10.95	2	HSEE200619	115	2 x 6 / 29.0	2 x 10.95	2
HSEE200608	230	2 x 9 / 19.0	2 x 15.60	2	HSEE200620	115	2 x 9 / 19.0	2 x 15.60	2
HSEE200609	230	2 x 12 / 14.0	2 x 20.70	2	HSEE200621	115	2 x 12 / 14.0	2 x 20.70	2
HSEE200610	230	2 x 15 / 12.0	2 x 26.00	2	HSEE200622	115	2 x 15 / 12.0	2 x 26.00	2
HSEE200611	230	2 x 18 / 9.5	2 x 31.20	2	HSEE200623	115	2 x 18 / 9.5	2 x 31.20	2
HSEE200612	230	2 x 24 / 7.0	2 x 41.90	2	HSEE200624	115	2 x 24 / 7.0	2 x 41.90	2

SHENZHEN HIGHSTARTECH ELECTRONICS CO., LTD

HSEE2010 TRANSFORMER SERIES

1. FEATURES:

- (1) It is miniaturised to be easily PCB mounted.
- (2) It has very high insulation of 4000Vrms Hi-pot.
- (3) It accords with UL94V-0 flammability requirements.
- (4) Heat-resistance reaches 130°C.

2. APPLICATIONS:

- (1) Medical equipments; Test equipment.
- (2) Industrial equipments; Industrial controls; Industrial computers.
- (3) Avionics & telecom.


3. PART NUMBER SYSTEM:

HSEE - 2010 - 11

(1) (2) (3)

- (1) Series name.
- (2) 2010 is size.
- (3) 11 is sequence number.

4. PHYSICAL CHARACTERISTICS:

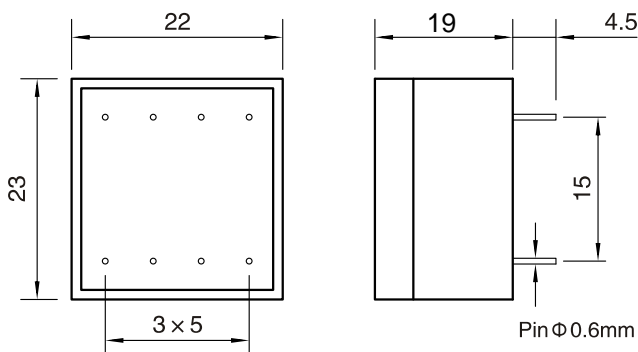

All dimensions in mm

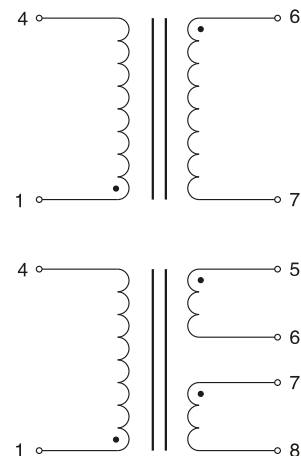


Fig 1

Fig 2

SHENZHEN HIGHSTARTECH ELECTRONICS CO., LTD

HSEE2010 TRANSFORMER SERIES

5. ELECTRICAL CHARACTERISTICS:

Part Number	Primary (V)	Secondary (V/mA)	No-load voltage(V)	Fig.	Part Number	Primary (V)	Secondary (V/mA)	No-load voltage(V)	Fig.
HSEE201001	230	6/83	8.90	1	HSEE201013	115	6 / 83	8.90	1
HSEE201002	230	9/55	13.50	1	HSEE201014	115	9 / 55	13.50	1
HSEE201003	230	12/42	19.40	1	HSEE201015	115	12 / 42	19.40	1
HSEE201004	230	15/34	24.60	1	HSEE201016	115	15 / 34	24.60	1
HSEE201005	230	18/28	29.50	1	HSEE201017	115	18 / 28	29.50	1
HSEE201006	230	24/21	39.60	1	HSEE201018	115	24 / 21	39.60	1
HSEE201007	230	2 x 6 / 42	2 x 9.6	2	HSEE201019	115	2 x 6 / 42	2 x 9.6	2
HSEE201008	230	2 x 9 / 28	2 x 15.2	2	HSEE201020	115	2 x 9 / 28	2 x 15.2	2
HSEE201009	230	2 x 12 / 21	2 x 19.1	2	HSEE201021	115	2 x 12 / 21	2 x 19.1	2
HSEE201010	230	2 x 15 / 16	2 x 23.3	2	HSEE200622	115	2 x 15 / 12.0	2 x 23.3	2
HSEE201011	230	2 x 18 / 14	2 x 29.20	2	HSEE201023	115	2 x 18 / 14	2 x 29.20	2
HSEE201012	230	2 x 24 / 10	2 x 38.8	2	HSEE201024	115	2 x 24 / 10	2 x 38.8	2